





中国认可 国际互认 检测 TESTING CNAS L4743

Test Report

No. AJFS1911011235FF

Date: NOV.19, 2019

Page 1 of 6

LIHE LINGXIAN TECHNICAL BEIJING CO., LTD

NO.2391, 2ND FLOOR, BUILDING 2, 7 SHIXING STREET, SHIJINGSHAN DISTRICT, BEIJING

The following sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion. results apply to the sample as received.

Sample Name: FIRE-RETARDANT MDF

SGS Ref No.: BJIN1911001534CM Specification: THICKNESS 15mm

Style/Item No.: /

Test Requested:

EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements—Part 1: Classification using data from reaction to fire tests, Class B

Test Results: -- See attached sheet -

Test Period:

Sample Receiving Date : NOV.05, 2019

Test Performing Date : NOV.05, 2019 TO NOV.15, 2019

Signed for and on behalf of SGS-CSTC Co., Ltd. Anji Branch

Allen Zou Lab Manager





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sg.s.com/en/Terms-and-Conditions.general-conditions.gener



No. AJFS1911011235FF

Date: NOV.19, 2019

Page 2 of 6

I. Test conducted

This test is conducted as per EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements — Part 1: Classification using data from reaction to fire tests. And the test methods as following:

- 1. EN 13823:2010+A1:2014 Reaction to fire tests for building products Building products excluding floorings exposed to the thermal attack by a single burning item.
- EN ISO 11925-2:2010+Corl:2011 Reaction to fire tests Ignitability of building products subjected to direct impingement of flame — Part 2: Single-flame source test.

II. Details of classified product

a) Nature and end use application

The product "Fire-retardant MDF" is defined as a decorative sheet. Its classification is valid for the following end use application: Interior materials.

b) Description

The product "Fire-retardant MDF", is described below:

Description	Fire-retardant MDF		
Color	Red		
Bulk Density	716 kg/m ³		
Thickness	15.0mm		

Mounting and fixing:

Calcium silicate board, with its density approximate 900kg/m³, thickness approximate 9mm, is as the substrate. The test specimens are fixed mechanically to the substrate with no cavity behind it. No joint in the long wing of the specimen.

III. Test results

Test method	Parameter	Number of tests	Results
	FIGRA _{0.2MJ} (W/s)		106.5
	FIGRA _{0.4MJ} (W/s)		106.5
EN 13823	Whether lateral flame spread (LFS) to the edge of specimen (Yes/No)		No
	THR _{600s} (MJ)	3	5.8
	SMOGRA (m²/s²)		25.6
	TSP _{600s} (m ²)		42.1
	Flaming particles or droplets (Yes/No)		No

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document last advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com



No. AJFS1911011235FF

Date: NOV.19, 2019

Page 3 of 6

Test method	Parameter	Specimen number	Results
EN ISO 11925-2 Exposure = 30 s	Whether vertical flame spread (Fs) in excess of 150 mm within 60s (Yes/No)	6	No
	Ignition of the filter paper (Yes/No)		No

IV. Classification and direct field of application

This classification has been carried out in accordance with EN 13501-1:2007+A1:2009.

a) Classification

The product, Fire-retardant MDF, classification is as following,

Fire behaviour		Smoke production			Flaming droplets	
В	_	S	1	,	d	0

Reaction to fire classification: B-s1, d0

Remark: The classes with their corresponding fire performance are given in annex A.

b) Field of application

This classification for the submitted sample is valid for the following end use condition:

- --- With all substrates classified A1 and A2
- --- With mechanically fixing
- --- No joint

This classification is valid for the following product parameters:

--- Characteristics of various layers identical to those as described in section II b) of this test reports.

Statement:

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

To be continued...



Jnless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed vereleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, or electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.<a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and-Conditio

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018825 www.sgsgroup.com.cn 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com



No. AJFS1911011235FF

Date: NOV.19, 2019

Page 4 of 6

Warning:

This classification report does not represent type approval or certification of the product.

The test laboratory has, therefore, play no part in sampling the product for the test, although it holds appropriate references to the manufacturer's factory production control that is aimed to be relevant to the samples tested and that will provide for their traceability.

Annex A

Classes of reaction to fire performance for construction products excluding floorings and linear pipe thermal insulation products

Class	Test method(s)		Classification criteria	Additional classification	
	EN ISO 1182 a and		△T≤30°C, and △m≤50%, and t _f =0(i.e. no sustained flaming)	-	
A1	EN ISO 1716		PCS≤2.0MJ/kg ^a and PCS≤2.0MJ/kg ^{b c} and PCS≤1.4MJ/m ² ^d and PCS≤2.0MJ/kg ^e	-	
	EN ISO 1182 a or		<i>∆ T</i> ≤50 °C , and <i>∆ m</i> ≤50%, and t _f ≤20 s	-	
A2	EN ISO 1716	and	PCS≤3.0MJ/kg a and PCS≤4.0MJ/m² b and PCS≤4.0MJ/m² d and PCS≤3.0MJ/kg e	-	
	EN 13823		FIGRA≤120W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤7.5MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g	
В	EN 13823	and	FIGRA≤120W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤7.5MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g	
	EN ISO 11925-2 [†] Exposure =30s		within 60s <i>F</i> s≤150mm	Fiaming droplets/particles 9	
С	EN 13823 and		FIGRA≤250W/s and LFS <edge and<br="" of="" specimen="">THR_{600s}≤15MJ</edge>	Smoke production ^f and Flaming droplets/particles ^g	
	EN ISO 11925-2 i Exposure=30s		Fs≤150mm within 60 s		
D	EN 13823	and	FIGRA≤750W/s	Conclusion found	
	EN ISO 11925-2 i Exposure=30s		<i>F</i> s≤150mm within 60 s	Smoke production f and Flaming droplets/particles g	
Е	EN ISO 11925-2 i Exposure =15s		<i>F</i> s≤150mm within 20 s	flaming droplets/particles h	

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.sspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/for Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document to advised that information contained hereon reflects the Company's findings at the time of its invertention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn 中国 -浙江 - 安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com



No. AJFS1911011235FF

Date: NOV.19, 2019

Page 5 of 6

F No performance determined

- ^a For homogeneous products and substantial components of non-homogeneous products.
- ^b For any external non-substantial component of non-homogeneous products.
- ^c Alternatively, any external non-substantial component having a PCS ≤ 2,0 MJ/m², provided that the product satisfies the following criteria of EN 13823: FIGRA ≤ 20 W/s, and LFS < edge of specimen, and THR_{600s} ≤ 4,0 MJ, and s1, and d0.
- ^d For any internal non-substantial component of non-homogeneous products.
- e For the product as a whole.
- fin the last phase of the development of the test procedure, modifications of the smoke measurement system have been introduced, the effect of which needs further investigation. This may result in a modification of the limit values and/or parameters for the evaluation of the smoke production.
- $s1 = SMOGRA \leq 30m^2/s^2 \ and \ TSP_{600s} \leq 50m^2 \ ; \ s2 = SMOGRA \leq 180m^2/s^2 \ and \ TSP_{600s} \leq 200m^2; \ s3 = not \ s1 \ or \ s2$
- g d0 = No flaming droplets/ particles in EN 13823 within 600 s;
- d1 = no flaming droplets/ particles persisting longer than 10 s in EN 13823 within 600 s;
- d2 = not d0 or d1.
- Ignition of the paper in EN ISO 11925-2 results in a d2 classification.
- ^h Pass = no ignition of the paper (no classification);
- Fail = ignition of the paper (d2 classification).
- Under conditions of surface flame attack and, if appropriate to the end–use application of the product, edge flame attack.

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.sspx.and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/for Terms-and-Conditions/for Terms-and-Conditions/for Terms-and-Conditions/for Terms-and-Conditions/forms-

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn 中国 -浙江 - 安吉县阳光工业园二区阳光大道301号 邮编:313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com




No. AJFS1911011235FF

Date: NOV.19, 2019

Page 6 of 6

Photo Appendix:

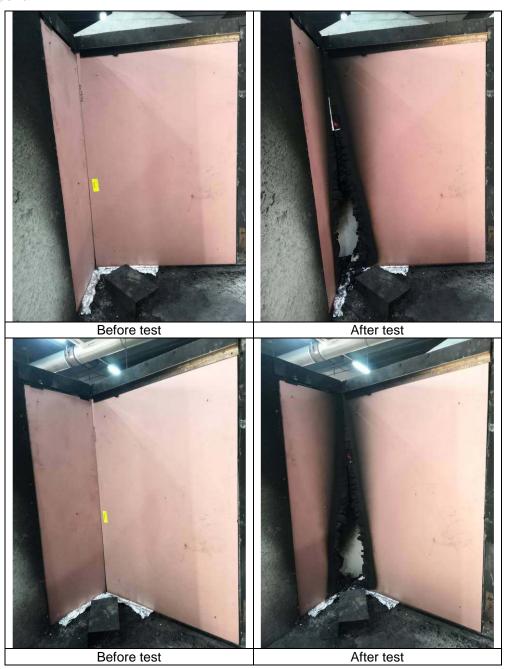

SGS authenticate the photo on original report only

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.for for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terma-document.sgs.com/en/Term

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejjang Province, China 313300 t t (86-572) 5018825 f (